


COBALT SDN





COBALT SDN 64073

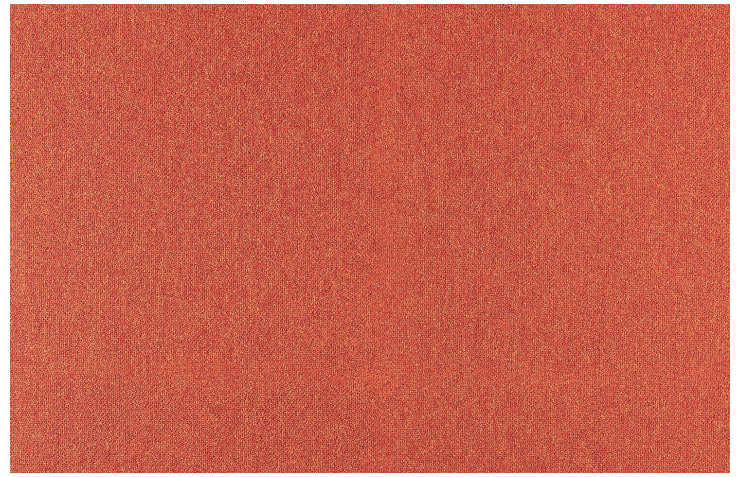

COBALT SDN 64038



COBALT SDN 64042



COBALT SDN 64049



COBALT SDN 64050



COBALT SDN 64051



COBALT SDN 64063

Technical details carpet tiles

Manufacturing type	tufted 1/10"		
Construction			loop pile
Pile composition			100% PA 6
Dye method			solution dyed
Primary backing			polyester fleece
Secondary backing			GREENBASE modified bitumen
Pile weight	ISO 2424	g/m ²	550 (+/-)
Total weight	ISO 8543	g/m ²	4.300 (+/-)
Pile height	ISO 1766	mm	3,0 (+/-)
Total height	ISO 1765	mm	6,0 (+/-)
Tuft density	ISO 1763	/m ²	164.000 (+/-)
Size		cm	50 x 50
Packing			20 per box 5 m²
Classification	EN 1307		33 heavy commercial
Comfort rating	EN 1307		LC 2
Castor chair	EN 985		r = 2.5 A (intensive)
Dimensional stability	EN 986		≤ 0,2%
Fire resistance	EN 13501-1		Bfl-S1 loose laid
Permanent antistatic	ISO 6356	kV	≤ 2,0
Transversal resistance	ISO 10965	Ω	≤ 10°
Thermal resistance	ISO 8302	m ² /K/W	0,070
Sound absorption	ISO 354	α _w	0,15
Impact sound reduction	ISO 10140	ΔL _w	24 dB
	ISO 10140	ΔL	39 dB (1000 Hz)
Light fastness	ISO 105 B02		8
Rubbing fastness	ISO 105 X12		4-5 wet/dry
Water fastness	ISO 105 E01		5 colour/staining

